

D-TEK-P-7


Board Type Vehicle Loop Detector

Applications

The D-TEK-P-7™ may be used in any location protected from the weather to detect vehicles for annunciation, triggering cameras, opening gates or doors, etc. Hook up is simplified using the HAR-7 wiring harness.

The D-TEK-P-7™ is available in 12 VDC to allow for wide power supply compatibility.

D-TEK-P-7

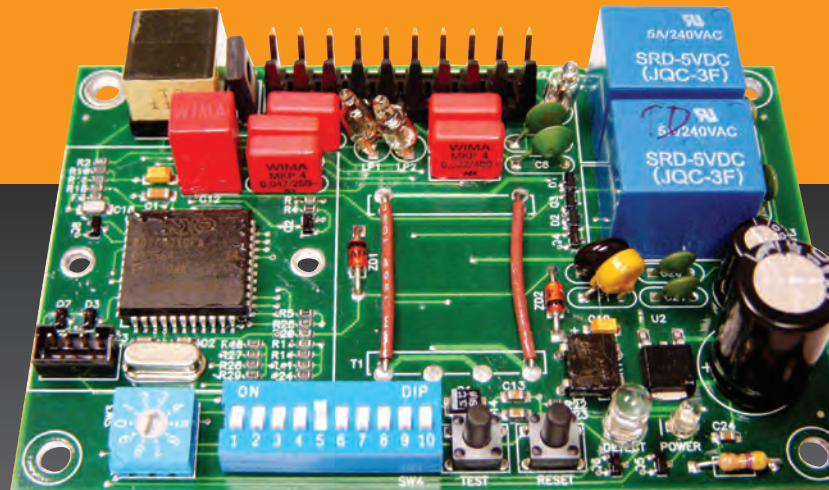

EMX Industries, Inc.

4564 Johnston Parkway, Cleveland, Ohio 44128

P. 800 426 9912 F. 216 518 9884

Sales Inquiries: salesupport@emxinc.com Technical Support: technical@emxinc.com

www.emxinc.com

FEATURES

Full fledged plug-in detector that works with many operators or systems that accept a dry contact trigger input.

- Loop Diagnostics
- Loop Isolation Transformer
- Loop Conditioner
- Surge Protection
- Loop Frequency Counter
- 10 Gold Plated Sensitivity Controls
- 8 Gold Plated Function Controls
- 6 Gold Plated Controls for Frequency, Reset & Frequency Counter
- Two High Intensity LED Indicators



EMX Lite Preformed Loop



HAR-7 Female Harness

Technical Data

Power Supply	12 VDC
Current Draw	100 mA max.
Dimensions	L= 4.125in (104mm) W= 2.687in (68mm) H= 1.1in (28mm)
Weight	0.32 lbs. (144.6g)
Loop Inductance	20...2000µH (Q factor > 5)
Environmental Tracking	Automatic Compensation
Operating Environment	-40° C...82° C (-40°F...180° F) 0...95% relative humidity
Connection	10 Pin Male Molex 09-72-2101
Loop Compensation	Isolation transformer allows operation with poor quality loops
Loop Frequency	4 settings (low, med-low, med-hi, high)
Output Relays (2)	(2) 5A/125V AC Presence and Pulse
Extend Output	3, 6 or 9 seconds DIP switch selectable
ASB (Automatic Sensitivity Boost)	Increases sensitivity after initial detection to prevent dropout due to high bed vehicles
Surge Protection	Loop circuitry protected by surge suppressors
Power / Loop Fault Indicator	Green LED
Detect / Frequency Count Indicator	Red LED
Reset Switch	Reset
Filter	Prevents detection from cross-traffic or RF interference (i.e. keying radio transmitter)
Sensitivity	10 levels 0-9
Environmental Protection	Conformal Coating

Ordering Information

- D-TEK-P-7-12 12V DC Board Detector
- HAR-7 Female 10 Position Harness
- PR-XX EMX Lite Preformed Loop XX= size

WARRANTY EMX INC. the product described herein for a period of 2 years under normal use and service from the date of sale to our customer. The product will be free from defects in material and workmanship. This warranty does not cover ordinary wear and tear, abuse, misuse, overloading, altered products, or damage caused by the purchaser from incorrect connections, or lightning damage. There is no warranty of merchantability. There are no warranties expressed, implied or any affirmation of fact or representation which extend beyond the description set forth herein. EMX Inc. sole responsibility and liability, and purchaser's exclusive remedy shall be limited to the repair or replacement at EMX's option of a part or parts not so conforming to the warranty. In no event shall EMX Inc. be liable for damages of any nature, including incidental or consequential damages, including but, not limited to any damages resulting from non-conformity defect in material or workmanship. Rev 1.2 04/01/13