



File Options Help

### Sensor Settings

Averaging

Triggering  Free Run  
 Level  
 Edge

Minimum Output Duration (ms)

Illumination (%)

### Sensor Communications

Port  COM1  COM2

Communication status:

Serial Number:

### Color Recognition Channels

Channel

Recognition Mode  Color & Luminosity  
 Color only

Recognition Enabled

	RED	GREEN	BLUE
Color (%)	<input type="text" value="18.0"/>	<input type="text" value="38.1"/>	<input type="text" value="74.3"/>
Tolerance (%)	<input type="text" value="10.0"/>	<input type="text" value="9.0"/>	<input type="text" value="8.0"/>


Luminosity (%)

Match output  High  
 Low

### Current Reading

Display Mode  Color & Luminosity  
 Color only

RED	GREEN	BLUE
<input type="text" value="18.0"/>	<input type="text" value="38.3"/>	<input type="text" value="74.6"/>

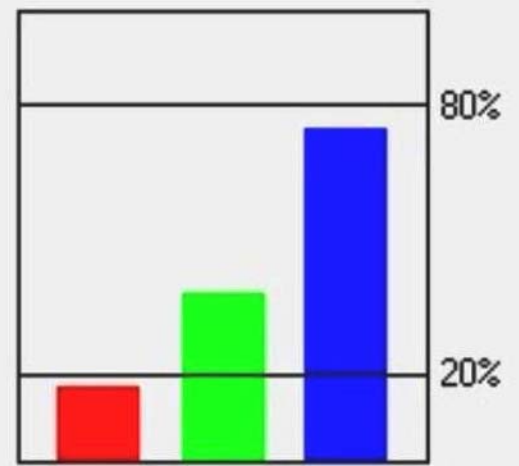

### Recognized Colors

- Channel 1  Low
- Channel 2  Low
- Channel 3  Low
- Channel 4  Low
- Channel 5  High
- Channel 6  Low
- Channel 7  Low