

BAT 1 956 S - BAT 2 956 S



- Sensing distance on reflector 50x50 mm :
 BAT 1 : 0-80 cm - Reflector at 80 cm max.
 BAT 2 : 0-140 cm - Reflector between 40 cm and 140 cm
- Supply : 10 / 30 VDC
- Output : PNP / NPN
- On-delay or off-delay timer




Description :

- Simple and quick set-up for self-teach
- Coaxial emitter-receiver
- Immunity to reflections interferences
- Adjustable timer
- Alignment indicator
- Dirty optics indicator
- Keyboard lock
- Remote input for self-teach
- Direct or inverse output
- Output : PNP / NPN
- M8 plug
- Polycarbonate strong housing


Applications :

- Through-beam on a conveyor : glass
- Detection of transparent parts (glass, PET,...).
- Bottle detection on blow moulding machinery (PET, glass, ...).


Dimensions

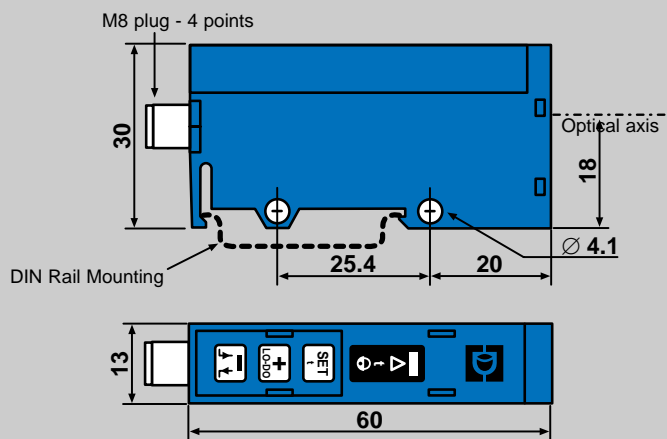

Wiring Connections

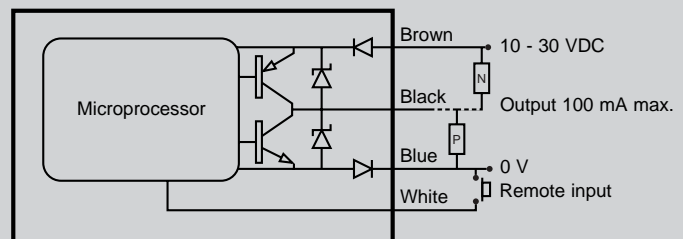

Visualisation and Keyboard

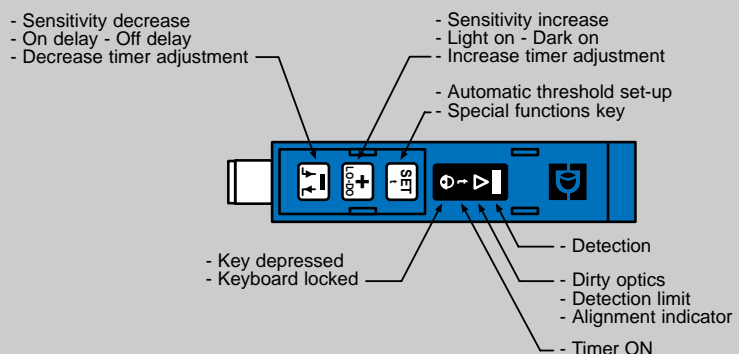

Technical Information

Supply	voltage	10 / 30 VDC ripple < 10% within specified limits
	consumption	< 45 mA
Response time	t _{on} or t _{off}	< 500 μs
	switching frequency	< 1 KHz
Output	max. nominal intensity	100 mA
	residual voltage at 100 mA	< 2 V
	residual voltage at 10 mA	< 1 V
Emission	LED	red
	modulation frequency	8 KHz
Timer	range	0 to 5 s with 11 increments
	increment duration	first increment : 40 ms, following increments : 500 ms
Temperature	operating	0 to 50 °C
	storage	-20 to 80 °C
External light immunity	incandescent light	10 000 lux
	sunlight	20 000 lux
Protections	supply	inverse polarity protection
	output	permanent short-circuit or over-load protection
	degree of protection	IP 67 (connector on place)
Remote input	on	voltage < 1.4 V
	off	voltage > 3 V



To Place Order

Product	Sensor for transparent products
Reference	BAT 1 - () - 956 S
	BAT 2 - () - 956 S
Type (cable on request)	(C0) output M8 plug without cable (C2) output M8 plug with cable 2m (C5) output M8 plug with cable 5m

TYPES OF APPLICATIONS

Example 1

Detection of a plastic film.

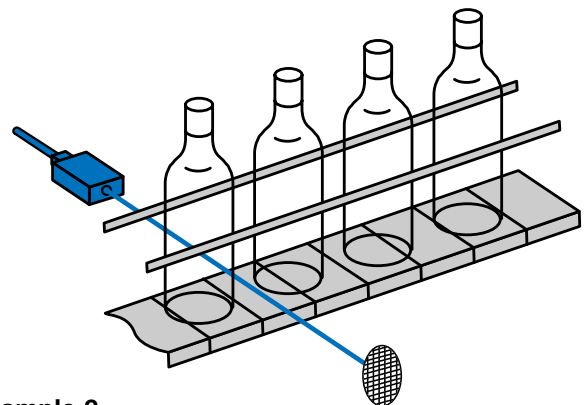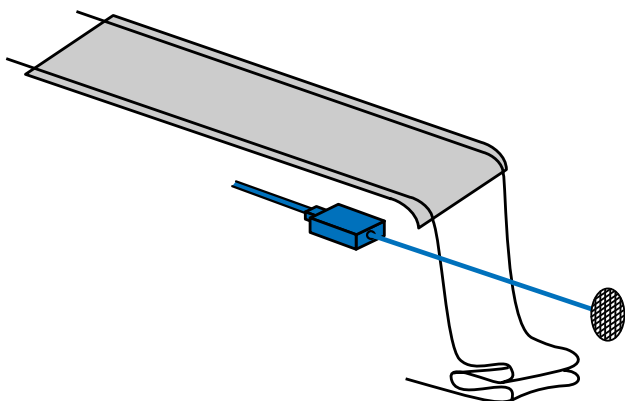

Example 2

Detection of transparent bottles (glass, PET,...).